Factory direct supply

Our Pulse Oximeter Details



Material: ABS+PC (Environmental friendly level)




(Information meet standards)













With Silicone pad (More comfortable to use)



200 pcs a carton

Model: C101A2



SpO2	Measurement range: 70~99%	
	Resolution: ±1%	
	Accuracy: ±2% (70%~99%),	
	unspecified (<70%)	
Pulse rate	Measurement range: 30~240 bpm	
	Resolution: ±1%	
	Accuracy: ±2bpm or ±2% (select larger)	
	Low Perfusion ≤0.4%	
Power	1.5V (AAA size)	
	alkaline battery x 2 (not include)	
	Supply voltage: 2.6~3.6V	
Working current	≤30mA	
Automatic	Automatically power off when no signal in	
power-off	the oximeter for more than 8 seconds	
Packing Details & Weight	420*360*440mm/200pcs	
	12.8 KG/ Carton	













- ✓ Newest design which has several parameters: SPO2, PR, PI
- ✓ Display: OLED color display
- ✓ Multi-direction display: Rotatable multidirectional display. 4 directions, 4 modes
- ✓ PI Indicator: Perfusion Index. It reflects the amount of blood flow being measured by the oximeter. A health care professional tests blood establish norms and aid in identifying changes in a patient's condition.
- ✓ Alarm function: Set the alarm and beep according to your needs. There will be a warning once the measured values go beyond the settin it immediately.
- ✓ Automatic power off function in 8 seconds

Model: C101H1



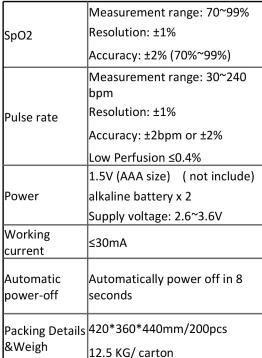










- ✓ Newest design which has several parameters: SPO2, PR, PI
- ✓ Display: OLED color display
- ✓ Multi-direction display: Rotatable multidirectional display. 4 directions, 4 modes
- ✓ PI Indicator: Perfusion Index. It reflects the amount of blood flow being measured by the oximeter. A health care professional tests blood flow to establish norms and aid in identifying changes in a patient's condition.
- ✓ Alarm function: Set the alarm and beep according to your needs. There will be a warning once the measured values go beyond the setting. Know it immediately.
- ✓ Automatic power off function in 8 seconds

Model: C101A3



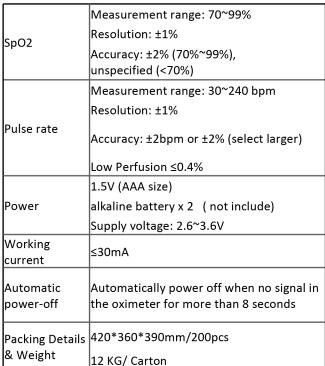










- ✓ Newest design which has several parameters: SPO2, PR, PI
- ✓ Display: OLED color display
- ✓ Multi-direction display: Rotatable multidirectional display. 4 directions, 4 modes
- ✓ PI Indicator: Perfusion Index. It reflects the amount of blood flow being measured by the oximeter. A health care professional tests blood flow to establish norms and aid in identifying changes in a patient's condition.
- ✓ Alarm function: Set the alarm and beep according to your needs. There will be a warning once the measured values go beyond the setting. Know it immediately.
- ✓ Automatic power off function in 8 seconds

Model: C101B1



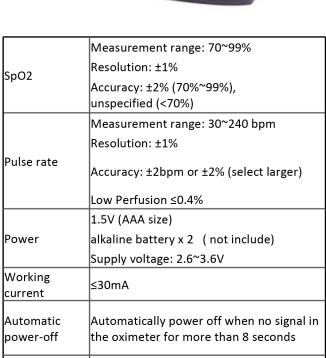

Packing Details 420*360*440mm/200pcs

14 KG/ Carton

& Weight









- ✓ Newest design which has several parameters: SPO2, PR, PI
- ✓ Display: can choose TFT or OLED color display (in the pictures is TFT)
- ✓ Multi-direction display: Rotatable multidirectional display. 4 directions, 4 modes
- ✓ PI Indicator: Perfusion Index. It reflects the amount of blood flow being measured by the oximeter. A health care professional tests blood flow to establish norms and aid in identifying changes in a patient's condition.
- ✓ Alarm function: Set the alarm and beep according to your needs. There will be a warning once the measured values go beyond the setting. Know it immediately.
- ✓ Automatic power off function in 8 seconds

Mesh nebulizer Series

Model: YM-3R9















Speceification	oscillation frequency:100khz \pm 10% condensation rate: \ge 0. $25m1/min$ atomized particles: \le 5um medication flow rate:approx.0.4ml/min volume:max.10ml housing material:ABS operating conditions:temperature:+5°C-+40°C relative hunidity: < 80%non-con-densing
Mains connection	10-240V,50-60HZ,0.15A
power	DC5V/1000mA USB power adapter or 2* 1.5v (2 sets of 5 AA alkaline, no battery included)
Dimension & Weight	45(w)*45(h)*100(L)mm 59*30*35cm/50PCS/12.8KG 278g(without batteries)

- ▲ Fine particles: large fog, fine atomized particles, particles can reach 1-5 m, drug absorption more fully
- ▲ High speed: microporous spray tablets, atomization speed 0.2ml/min
- ▲ Quieter: with piezoelectric components, quieter design with low noise
- ▲ Flashing light: green light means normal operation, red light means no power or insufficient voltage
- ▲ Energy-saving and environmental protection: skin-friendly and environment-friendly, the mask adopts PP (polypropylene) as the main material, without DEHP (plasticizer/plasticizer)

Mesh nebulizer Series

Model: YM-3R8













Speceification	oscillation frequency:100khz \pm 10% condensation rate: \ge 0. $25m1/min$ atomized particles: \le 5um medication flow rate:approx.0.4ml/min volume:max.10ml housing material:ABS operating conditions:temperature:+5°C-+40°C relative hunidity: < 80%non-con-densing
Mains connection	10-240V,50-60HZ,0.15A
power	DC5V/1000mA USB power adapter or 2* 1.5v (2 sets of 5 AA alkaline, no battery included)
Dimension & Weight	45(w)*45(h)*100(L)mm 59*30*35cm/48PCS/12.8KG 278g(without batteries)

- ▲ Fine particles: large fog, fine atomized particles, particles can reach 1-5 m, drug absorption more fully
- ▲ High speed: microporous spray tablets, atomization speed 0.2ml/min
- ▲ Quieter: with piezoelectric components, quieter design with low noise
- ▲ Flashing light: green light means normal operation, red light means no power or insufficient voltage
- ▲ Energy-saving and environmental protection: skin-friendly and environment-friendly, the mask adopts PP (polypropylene) as the main material, without DEHP (plasticizer/plasticizer)

Blood glucose meter series

Model: BGM-66T1



Model	BGM-66T1		
Detection range	1.1-33.3mmol/L		
Operating temperature	10-40°C		
Testing time	10 seconds		
Hematocrit rate	30% -50%		
Sample Size	Minimum 1 microliter		
Blood collection	Fingers, forearm, palm		
Battery	AAA*2 (1 pair)		



- ▲ 1. Intimate large screen: 1.7 inches, convenient for the elderly to view
- ▲2. The unit mode of mmol/L or mg/dL can be converted arbitrarily
- ▲3. You can view the average of 7 days, 14 days and 24 days
- ▲4. Memorize 256 sets of data! Easy to compare
- ▲5.1 pair of AAA batteries, convenient for customers to buy batteries locally
- ▲6. The whole package is convenient for display and sale
- ▲7. Imported chips, fast, stable and accurate data
- ▲8. 1 year warranty, worry-free after sale

Blood glucose meter series

Model: DS-6



Blood glucose meter

Model	DS-6
Detection range	1.1-33.3mmol/L
Operating temperature	10-40°C
Testing time	10 seconds
Hematocrit rate	30% -50%
Sample Size	Minimum 1 microliter
Blood collection	Fingers, forearm, palm
Battery	AAA*2 (1 pair)

Features

- ▲ High performance measurement more eaccurate (Using powerful imported chips to quickly and accurately analyze the transfer of test strips)
- ▲ Less blood sample, fast and stable testing

0.7ul blood sample, only need 5 second from testing to evaluation.

- ▲ Monitoring results in 5 seconds
- ▲ Convenient and simple operation

One-key measurement

▲ LCD high-definition large screen display

Easy to read, especially for elders

▲ 500 Test Memories

Hot Selling Ozone disinfector

Model: YM-32D1











Model	YM-32D1
Product Size	212 *85 *155 mm
Product weight	410 g
Accessories	Yes
Color	White
charging time	3 hours
Battery	Built-in lithium battery
Batterycapacity 2000mA	2000mA

- ▲ 1. Small and light, easy to carry, can be used in many situations, for example: disinfect cell phones, accessories, underwear, cars, ventilators), Kill more than 99.99% germs
- ▲ 2. Three working modes are available: M1, timing mode, M2, intermittent mode and M3 continuous mode
- ▲ 3. Built-in large capacity lithium battery, charge one time, can use many times
- ▲ 4. Equipped with 1 storage bag, which is convenient for customers to store. At the same time, it is equipped with a USB cable. Customers can use it as long as their own charger. We provide 4 different sizes adapters, and customers can match their own different sizes pipes to use

Hot Selling fetal doppler

Model: YM-2T8







Model	YM-2T8
FHR Measurement Range:	50-210(BPM:SUB/minute)
Accuracy:	±2bpm
working frequency:	2MHZ (2.0±5%MHZ)
Mains connection	2.0MHZ 5 , D.C.3V
Power	battery:2*1.5V AA alkaline (no battery included)
Dimension & Weight	20*360*430mm/40PCS/14KG

- ▲ 1,Small and portable, easy to use, convenient for pregnant women to monitor fetal heart rate at any time and anywhere
- ▲2, High-definition OLED large screen display, read data more clearly
- ▲3, High sensitivity probe, can find fetal position quickly, and detect fetal heart rate accurately, can detect the baby's heart at eight weeks
- ▲4, Use thick USB cable, anti-interference ability is stronger, hear the fetal heart is clearer
- ▲5, CE, FDA, ISO available. Meet international standard
- ▲6, Two no. 5 (AA) batteries can work continuously and shut down automatically without signal for 1 minute

Model: YM-5L8



Wrist Blood Pressure Monitor

Features

▲ 1.99 sets memory group

▲ 2. Measure range: Pressure :20-280mmHg(2.7-37kPa) Pulse rate :40-160times/min.

 \blacktriangle 3. Accuracy: Pressure: \pm 3mmHg (within \pm 4kPa). Pulse rate:accuracy is \pm 5%

▲ 4. Display : Digital liquid crystal display▲ 5. Battery: Two alkaline batteries (AAA)

△ 6. Operating temperatures: 5.0 to 40.0° C, ≤85% RH

▲ 7. Dimensions: 82x70 x25mm

▲ 8. Auto power off: power off when no operation for 1 minute

▲ 9.Rour modes are selected to adjust the value of sound setting. Press the '+' and '-' button on the side to increase and reduce the volume

Packing:

50 pcs a carton

Each Carton Size: 42*40*20 cm Each Carton Gross Weight: 8.8 KG

Selling points:

Portable and convienient
Big Screen, easy to read
With or without voice for option
Electronic CE
2 years warranty

Model: BP-01



Arm Blood Pressure Monitor

Features

▲1. Double 99 memory group:. For 2 peoples

▲2. Measure range: Pressure :40-280mmHg(5.3-37.3kPa) Pulse rate :40-199times/min. Wrist band display range: 0-299mmHg(0-39.9kPa)

 \triangle 3. Accuracy: Pressure: \pm 3mmHg (within \pm 4kPa). Pulse rate:accuracy is \pm 5%

▲ 4. Power supply: Four alkaline batteries (AAA) or DC6V

▲5. Live Voice (Optional)

▲ 6. Battery lifespan: 300 times under the condition of 7 alkaline battery with 23°C.

▲7. Operating temperatures: 5.0 to 40.0° C, ≤85% RH

▲8. Dimensions: 115x96 x59mm

▲9.Weight: 220g (exclude battery's weight)

▲ 10. Auto power off: power off when no operation for 1 minute

Packing:

30 pcs a carton

Each Carton Size: 52*25.5*48.5 cm Each Carton Gross Weight: 14.5 KG

Selling points:

Larger screen
Cheapest Price
1 years warranty

Model: K289



Arm Blood Pressure Monitor

Features

▲1. Double 99 memory group:. For 2 peoples

▲2. Measure range: Pressure :40-280mmHg(5.3-37.3kPa) Pulse rate :40-199times/min. Wrist band display range: 0-299mmHg(0-39.9kPa)

 \blacktriangle 3. Accuracy: Pressure: \pm 3mmHg (within \pm 4kPa). Pulse rate:accuracy is \pm 5%

▲ 4. Power supply: Four alkaline batteries (AAA) or DC6V

▲5. Live Voice (Optional)

▲ 6. Battery lifespan: 300 times under the condition of 7 alkaline battery with 23°C.

▲7. Operating temperatures: 5.0 to 40.0° C, ≤85% RH

▲8. Dimensions: 115x96 x59mm

▲9.Weight: 220g (exclude battery's weight)

▲ 10. Auto power off: power off when no operation for 1 minute

Packing:

30 pcs a carton

Each Carton Size: 52*35*36 cm Each Carton Gross Weight: 14.5 KG

Selling points:

Certificate: CE, ISO13485 Cheap price but high quality With or without voice for option

Model: B01



Arm Blood Pressure Monitor

Features

▲ 1.99 sets of Storage

▲2. Measure range: Pressure :0-280mmHg(0-37.3kPa) Pulse rate :40-199 times/min.

 \blacktriangle 3. Accuracy: Pressure: \pm 3mmHg (within \pm 4kPa). Pulse rate:accuracy is \pm 5%

▲4. Display: Digital liquid crystal display

▲5. Sensor: Semiconductor resistance sensor

▲ 6. Inflating mode: Automatic intelligent pressurization

▲ 7. Power supply mode: 4pcs 1.5V AAA alkaline batteries (not including), Input: AC 100-240V 50/60HZ, Output: DC 6V 1A

▲8. Operating temperatures: 5.0 to 40.0° C, ≤85% RH

▲9. Auto power Shut Off: Not testing one min auto shut off

▲ 10. Size: 12.5*8.3*17cm, gross weight: 420g/pc

Packing:

40 pcs a carton

Each Carton Size: 52*43*45 cm Each Carton Gross Weight: 14 KG

Selling points:

Certificate: CE, ISO13485

Cheapest price but high quality With or without voice for option

2 years warranty

Model: K2



Arm Blood Pressure Monitor

Features

▲1. Double 99 memory group:. For 2 peoples

▲2. Measure range: Pressure :40-280mmHg(5.3-37.3kPa) Pulse rate :40-199times/min. Wrist band display range: 0-299mmHg(0-39.9kPa)

 \blacktriangle 3. Accuracy: Pressure: \pm 3mmHg (within \pm 4kPa). Pulse rate:accuracy is \pm 5%

▲ 4. Power supply: Four alkaline batteries (AAA) or DC6V

▲5. Live Voice (Optional)

▲ 6. Battery lifespan: 300 times under the condition of 7 alkaline battery with 23°C.

▲7. Operating temperatures: 5.0 to 40.0° C, ≤85% RH

▲8. Dimensions: 115x96 x59mm

▲9.Weight: 220g (exclude battery's weight)

▲ 10. Auto power off: power off when no operation for 1 minute

Packing:

30 pcs a carton

Each Carton Size: 52*35*36 cm Each Carton Gross Weight: 14.5 KG

Selling points:

Good-looking

Certificate: Electronic CE Hot selling in the market

Model: K8



Arm Blood Pressure Monitor

Features

▲1. Double 99 memory group:. For 2 peoples

▲2. Measure range: Pressure :40-280mmHg(5.3-37.3kPa) Pulse rate :40-199times/min. Wrist band display range: 0-299mmHg(0-39.9kPa)

 \blacktriangle 3. Accuracy: Pressure: \pm 3mmHg (within \pm 4kPa). Pulse rate:accuracy is \pm 5%

▲4. Power supply: Four alkaline batteries (AAA) or DC6V

▲5. Live Voice (Optional)

▲ 6. Battery lifespan: 300 times under the condition of 7 alkaline battery with 23°C.

▲7. Operating temperatures: 5.0 to 40.0° C, ≤85% RH

▲8. Dimensions: 115x96 x59mm

▲9.Weight: 220g (exclude battery's weight)

▲ 10. Auto power off: power off when no operation for 1 minute

Packing:

30 pcs a carton

Each Carton Size: 52*35*36 cm Each Carton Gross Weight: 14.5 KG

Selling points:

Good-looking

Certificate: Electronic CE

1 years warranty

Model: M3



Arm Blood Pressure Monitor

Features

▲1. 120 sets memory group

▲2. Measure range: Pressure :0-299mmHg(0-39.9kPa) Pulse rate :40-180times/min.

 \blacktriangle 3. Accuracy: Pressure: \pm 3mmHg (within \pm 4kPa). Pulse rate:accuracy is \pm 5%

▲ 4. Display: Digital liquid crystal display ▲ 5. Battery: Two alkaline batteries (AAA)

△6. Operating temperatures: 5.0 to 40.0° C, ≤85% RH

▲7. Dimensions: 78.5x68.5 x30mm

▲8. Auto power off: power off when no operation for 1 minute

Packing:

24 pcs a carton

Each Carton Size: 42.5*37.5*44.5 cm Each Carton Gross Weight:14.5 KG

Selling points:

Certificate: 510K FDA
High quality and durable
2 years warranty

Model: K283



Arm Blood Pressure Monitor

Features

▲1. Double 99 memory group:. For 2 peoples

▲2. Measure range: Pressure :40-280mmHg(5.3-37.3kPa) Pulse rate :40-199times/min. Wrist band display range: 0-299mmHg(0-39.9kPa)

 \blacktriangle 3. Accuracy: Pressure: \pm 3mmHg (within \pm 4kPa). Pulse rate:accuracy is \pm 5%

▲4. Power supply: Four alkaline batteries (AAA) or DC6V

▲5. Live Voice (Optional)

▲ 6. Battery lifespan: 300 times under the condition of 7 alkaline battery with 23°C.

▲7. Operating temperatures: 5.0 to 40.0° C, ≤85% RH

▲8. Dimensions: 115x96 x59mm

▲9.Weight: 220g (exclude battery's weight)

▲ 10. Auto power off: power off when no operation for 1 minute

Packing:

30 pcs a carton

Each Carton Size: 52*35*36 cm Each Carton Gross Weight:14.5 KG

Thermometer series

Model: IT121



Features

▲ Excellent adaption to ambient temperature.

▲ Accurat reliable even udner complicated surrounding.

Body mode and object mode availabe, One switch change mode.

▲ Beeper for fever or high temperature (alarm value can defined by user)

▲C / F reading available

▲ Auto shut-off: 10 seconds without operation

Selling points:

- * Imported sensor and chip
- * For Ear and Forehead
- * 510K FDA approved
- * 2 years warranty

Ear and Forehead Thermometer

Thermometer series

Model: IT122



Non-contact Infrare Thermometer

Features

▲ Excellent adaption to ambient temperature.

▲ Accurat reliable even udner complicated surrounding.

▲ Body mode and object mode availabe, One switch change mode.

▲ Beeper for fever or high temperature (alarm value can defined by user)

▲C / F reading available

▲ Auto shut-off: 10 seconds without operation

color availabe: Blue, Purple, Pink

Packing:

60 pcs a carton

Each Carton Size: 63*40.5*39.5 cm Each Carton Gross Weight:8 KG

Selling points:

- * Non-contact
- * CE approved
- * In WHITE LIST
- * 2 years warranty

Thermometer series

Model: KF30



Non-contact Infrare Thermometer

Features

▲ Fast Measurement

▲C / F reading available

▲16 reading memory

▲ Excellent adaption to ambient temperature.

▲ Accurat reliable even udner complicated surrounding.

▲ Body mode and object mode availabe, One switch change mode.

▲ Beeper for fever or high temperature (alarm value can defined by user)

▲ Auto shut-off: 10 seconds without operation

▲ Color: White

Packing:

100 pcs a carton

Each Carton Size: 42*36*43cm Each Carton Gross Weight:11 KG

Selling points:

* Non-contact

* CE approved


New design TENS

Model: DR132A



TENS/EMS Massager





Features

ATENS

Treat pain, such as period pain, labor pain, postoperative pain, joint pain neck and back pain

▲ EMS

Stimulate and strengthen muscles

▲ Red Light Theraph

620-680NM wavelength red light

▲ Dual output design

12 pre-programmed massage modes16 levels of intensity to meet your strength requirementDual output design for two person or two different body areas

▲ Power Supply

By USB or 3pcs AAA batteries

New design oral irrigator

Model: YM-258



oral irrigator

Features

▲ Frequency: 4000-7000 rpm

Material: ABS+PC Battery: 2400MAH

Water column pressure: 30-120 psi

Water tank: 165ML

Nozzle: 360° rotation for multi-directional flushing

Working mode: 10 modes are adjustable

Applicable voltage: 100-240V

Power supply mode: built-in rechargeable lithium battery

Waterproof rating: IPX7 waterproof

Charging method: USB Color: black, white

Weight: 248 grams (bare metal)

Applicable environment: home, tourism

Product size: 16.5*6.5*3.5cm Packing size: 170*90*50mm

Operating speed is 300ml/min~600ml/min

▲ Features:

Shock wave of fine water flow generated by high-pressure water jet pulse technology

Easily remove food residue between teeth and teeth Can reach multiple parts of the mouth, gums can be cleaned

Hot selling Stethoscope

Model: C206F



Features

Bandage: Nylon, 40*500MM

Ball, bag: PVC

Measuring range: 0-300mmHg

Other: ordinary valve

Stethoscope: Single-use stethoscope

Independent packaging: neutral color box, human leather bag

Product weight: 443G Product size: 195*210*70MM

Carton size: 55*37*37CM 50PCS per carton, gross weight 24KG

Product description:

Easy to operate, accurate measurement data, all-metal manufacturing, durable. The table type sphygmomanometer is a model specially designed for home users by the medical equipment manufacturer that produces the desktop sphygmomanometer. It is small and convenient to carry and has strong measurement accuracy. Its use method and measurement accuracy are all mercury table sphygmomanometers used by doctors in hospitals. Unanimous.